

KAESER
COMPRESSORS

Built for a lifetime.™



Oil-free Screw Compressors

CSG-2, DSG-2, and FSG-2 Series

Capacities from: 192 to 1774 cfm

Pressures from: 45 to 145 psig

kaeser.com

Oil-free Rotary Screw Compressors

The new dimension in oil-free compression

With logical component layout and exceptional attention to detail, Kaeser's 2-stage oil-free air compressors were designed specifically with the user in mind. Kaeser's renowned quality offers peace of mind and built for a lifetime™ reliability.

Long-term efficiency

Compressed air simply has to be available where and whenever it's needed. Kaeser's 2-stage oil-free rotary screw compressors are built to last and ensure many years of dependable performance. With nearly a century of experience in engineering, Kaeser's components are tried and tested to deliver the durability and compressed air availability needed to meet the toughest demands.

Innovation you can trust

Using all of the advantages that Kaeser's advanced Research and Development Center in Coburg, Germany has to offer, Kaeser's engineers have designed every detail of these oil-free air compressors with maximum efficiency and performance in mind.

Efficiency as standard


Kaeser quality and expertise really count when it comes to the all-important total system costs for asset investments such as compressors, or complete compressed air supply systems. Lowest possible compressed air costs and maximum availability can be guaranteed only through a combination of perfect interplay between energy efficiency and service / maintenance, and by viewing the compressed air supply system as a whole.

Service-friendly

These versatile systems were engineered for maximum ease-of-use and servicing right from the outset of the design stage. Fewer wearing parts and using premium quality materials ensure reduced maintenance requirements, longer service intervals, and extended service life. Excellent component accessibility as a result of generously sized maintenance doors and a swing-out cooler are just some of the features that make servicing these units so effortless.

Energy efficiency

Capital and maintenance costs account for only a small part of a compressor's total life cycle costs. Since energy accounts for the largest portion, it's wise to save with Kaeser's Life Cycle Management. Kaeser has been committed to minimizing your energy costs for compressed air production for over 40 years. We also have the bigger picture in mind when it comes to service and maintenance as well as maximum compressed air supply availability.

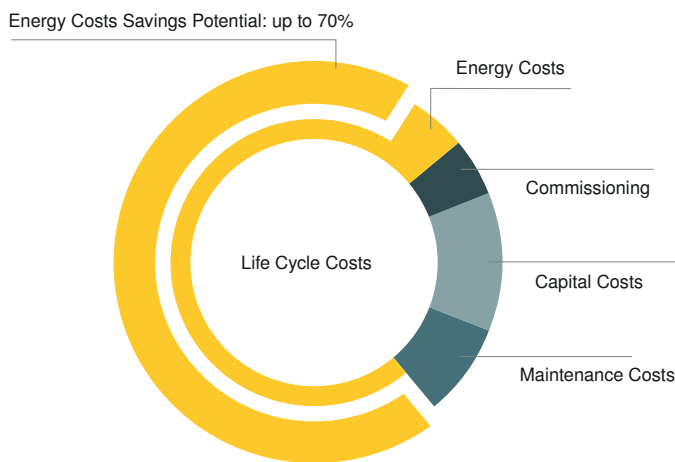




KAESER

FSG 420-2

OILFREE. AIR 

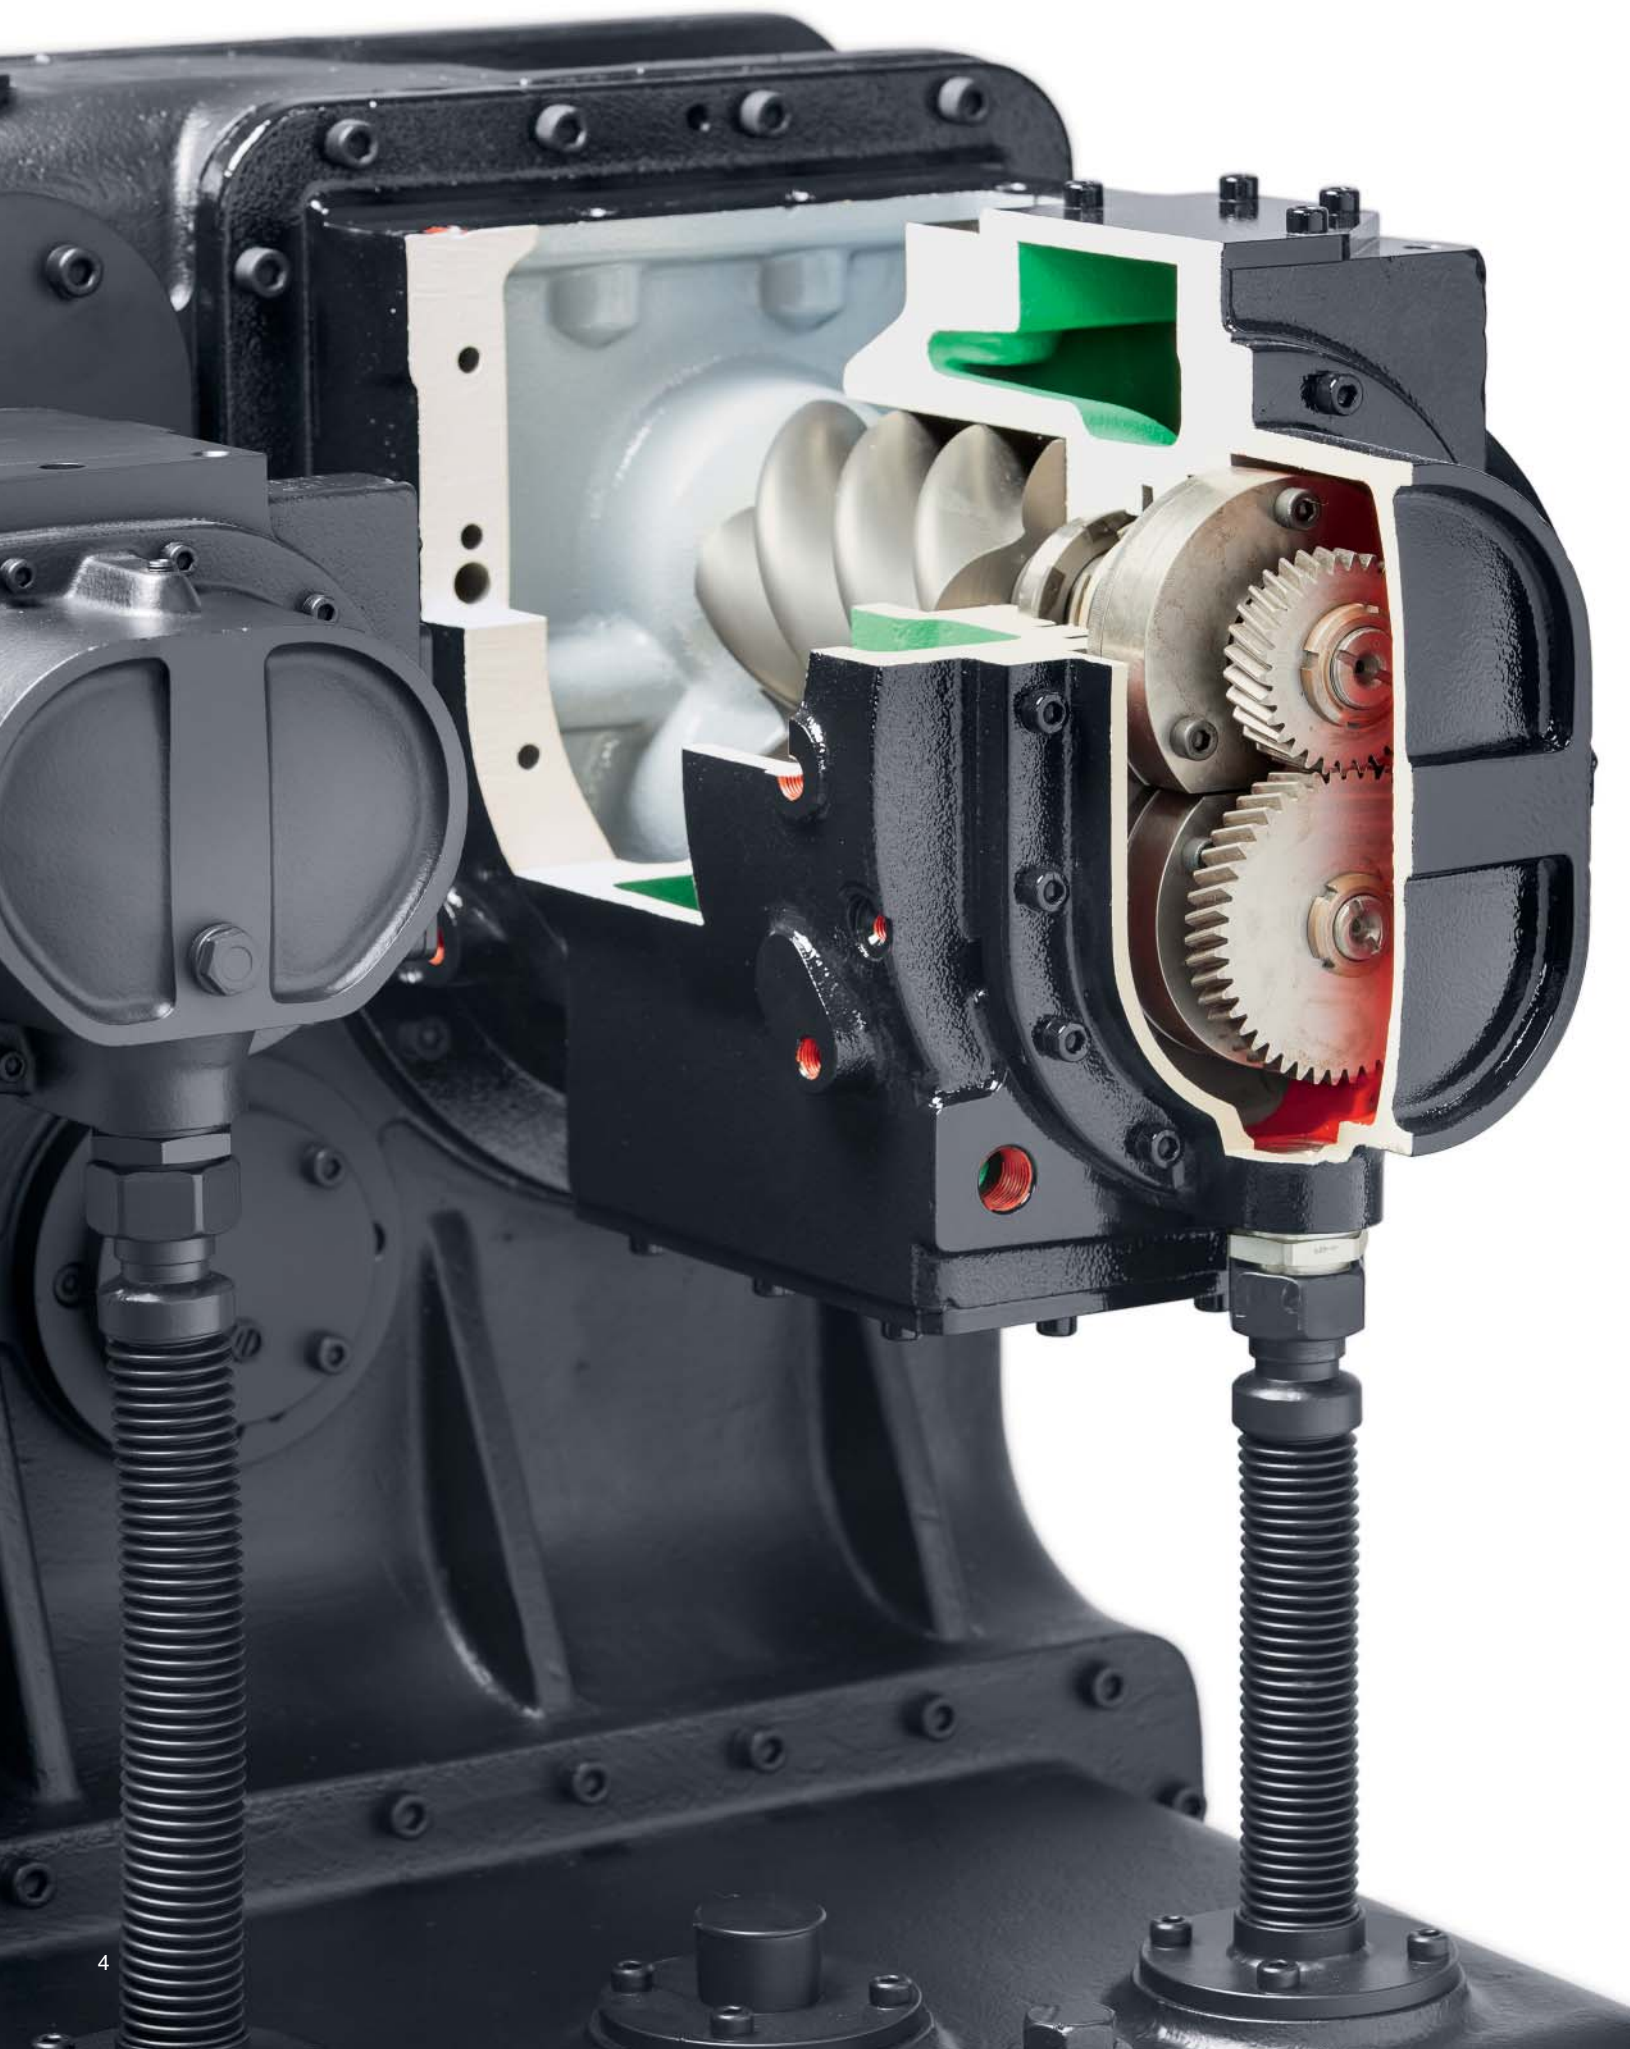

Kaeser airends: Precise, durable, efficient



Proven airends

At the heart of every Kaeser oil-free compressor lies a rugged, two-stage rotary screw airend proven to withstand the toughest operation. Providing optimum performance and dependability, every airend ensures maximum efficiency throughout its entire service life.




Durable coating

The blasted and bonderized rotors are treated using a special coating process which provides an innovative and durable coating resistant to temperatures up to 575°F. Because this coating is highly abrasion-proof, its sealing and protection performance remain consistent — even after years of operation — providing additional cost savings.



Chromium steel rotors

The second compression stage's rotors are made from stainless steel, which eliminates the risk of rotor corrosion and seizing.

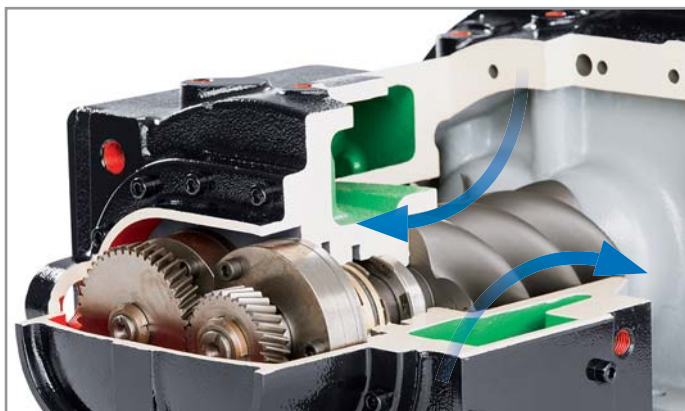

Jacket-cooled airend


Jacket cooling is used in the high pressure compression stage of the airend to ensure optimal heat dissipation, which greatly enhances efficiency.

Efficient drive systems with advanced control



Sigma Control 2™

The onboard controller ensures efficient control and compressor operation monitoring. The large display and RFID reader provide easy communication and maximum security. Multiple, selectable interfaces enable seamless networking capability, while the SD card slot makes updates quick and easy.

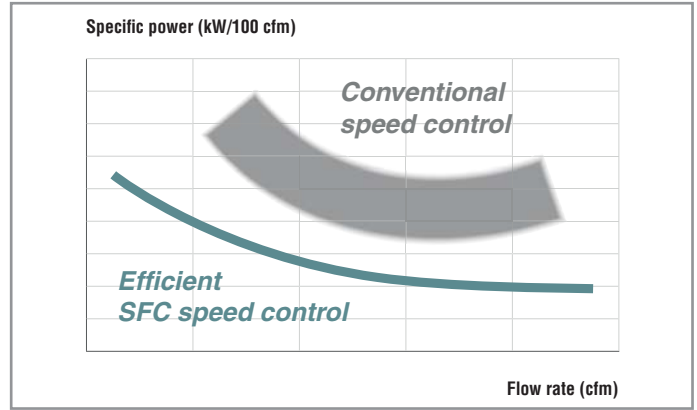

Optimized specific power

Together, the moderate maximum speed and near-constant specific power across the wide variable speed control range, achieve significant energy savings throughout the entire operating curve.



Premium efficiency drive motors

Kaeser uses premium efficiency Totally Enclosed Fan Cooled (TEFC) motors with class F insulation for extra protection from heat and contaminants. Each of the three motor windings is actively monitored through its own PT100 temperature sensor. Standard voltages are 460 or 575 V (3-phase, 60 Hz). Other voltages are available.



Sigma Air Manager 4.0

This advanced master control system can coordinate operation of up to 16 rotary screw compressors with maximum energy efficiency and also enables seamless documentation of all operational parameters.



120 PSIG 09:26 185°F
LOG-IN SUCCESSFUL
CHANGE PASSWORD: K00000100
NAME: S
LEVEL: 5
VALID UNTIL: 12/2018

KAESER



SIGMA CONTROL 2



Service-friendly



(1) Hydraulic inlet valve

The hydraulically operated inlet valve on Kaeser oil-free rotary compressors is unaffected by contamination and condensate. This makes the valve more reliable and easier to maintain than pneumatic styles.



(2) Fiber-free pulsation dampeners


Kaeser's fiber-free pulsation dampeners keep pressure losses to an absolute minimum, help maintain consistent air quality, and minimize unwanted vibration. In addition, their fiber-free design reliably eliminates the possibility of compressed air contamination.






(3) Easy access coupling


The electric motor directly drives the airend with zero transmission losses via a maintenance-free coupling. As there is no need for complicated disassembly or alignment work, the easy-access coupling can be exchanged quickly and easily.

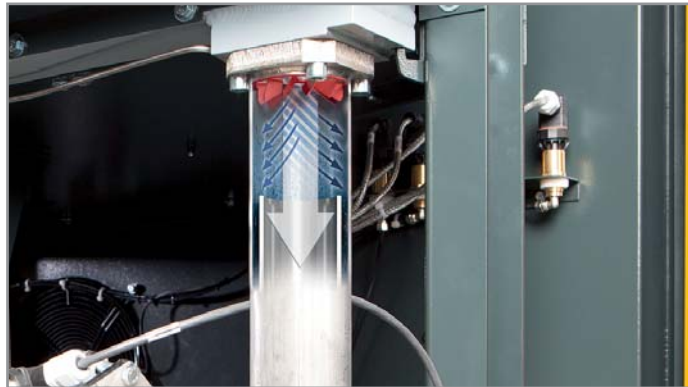

(4) High efficiency condensate separator

Thanks to its flow-optimized design, the newly developed condensate separator reliably separates the condensate downstream of the aircoolers—with minimal pressure loss.

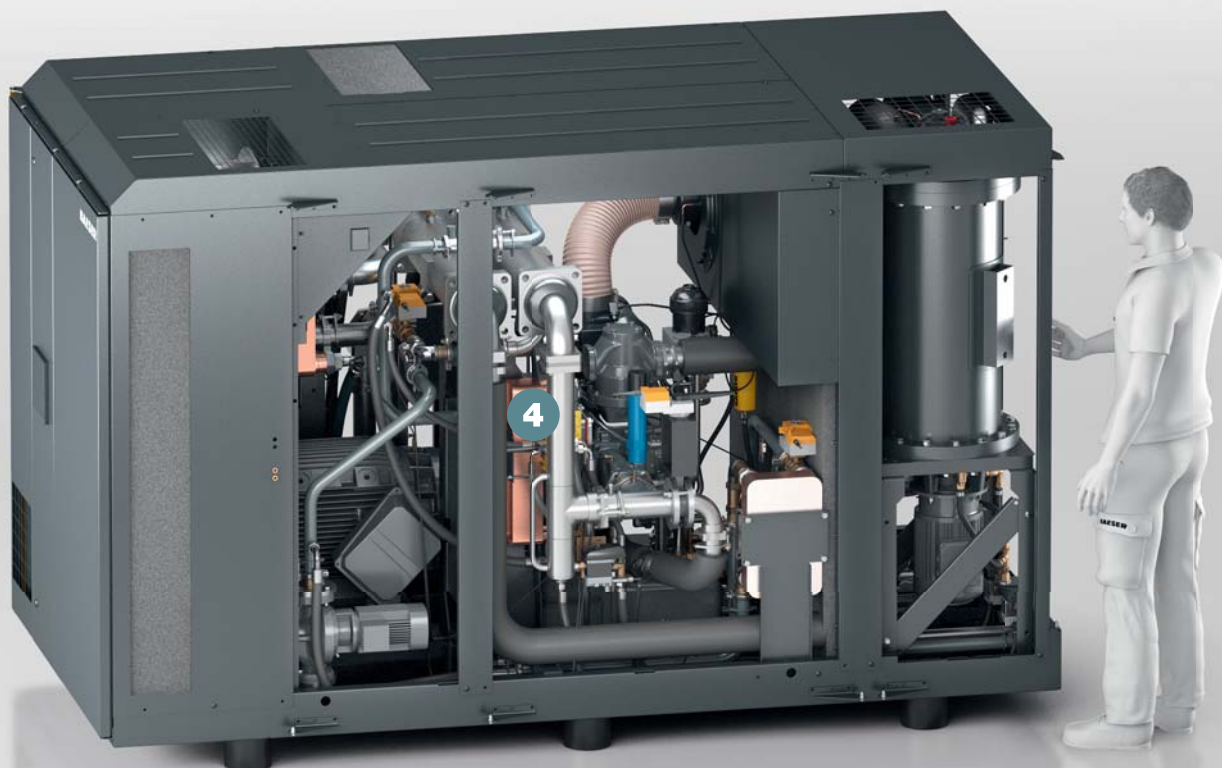

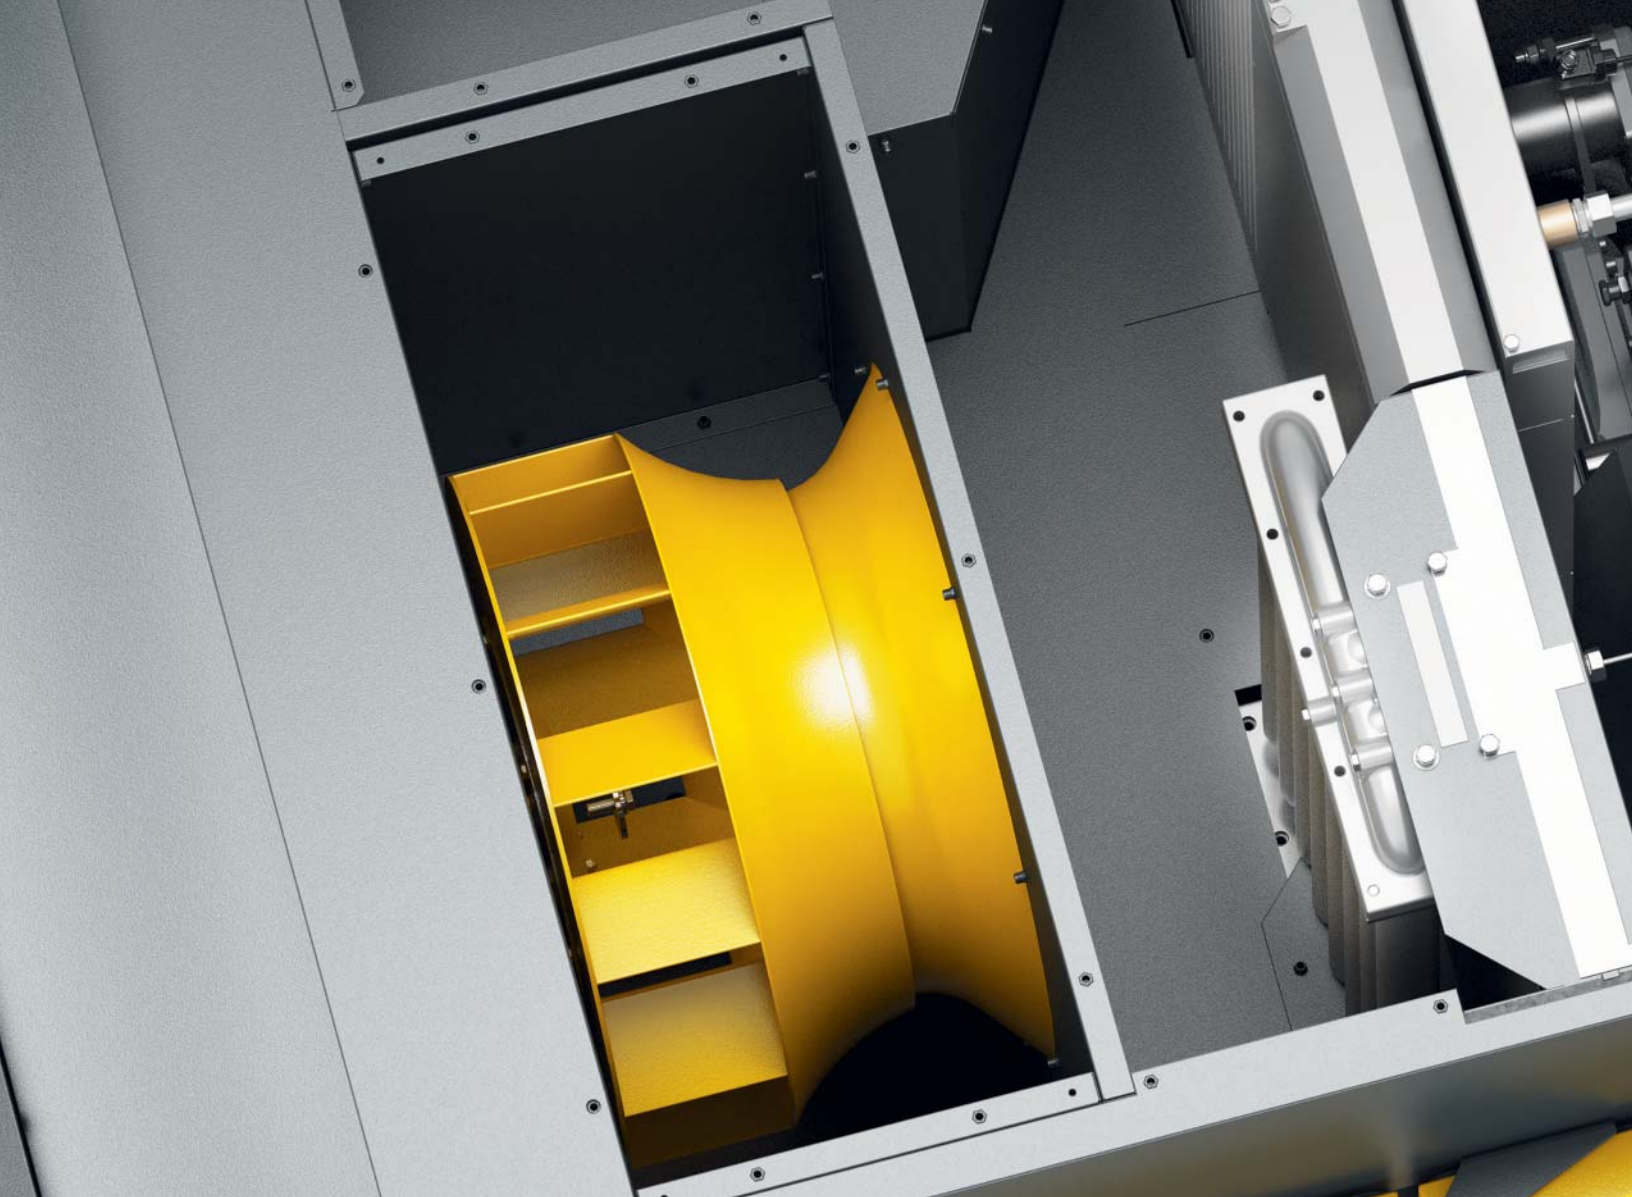


Cleaning made simple

Cleaning the aircoolers on DSG-2 and FSG-2 models is convenient and easy thanks to our unique swing-out design—no crane is needed. Service technicians can clean the coolers in considerably less time and right next to the machine, without the risk of contaminating the unit's interior.



Reliable operation even in extreme heat

Air-cooled units can operate dependably in ambient temperatures up to 115°F thanks to the durable and energy-efficient radial fan.

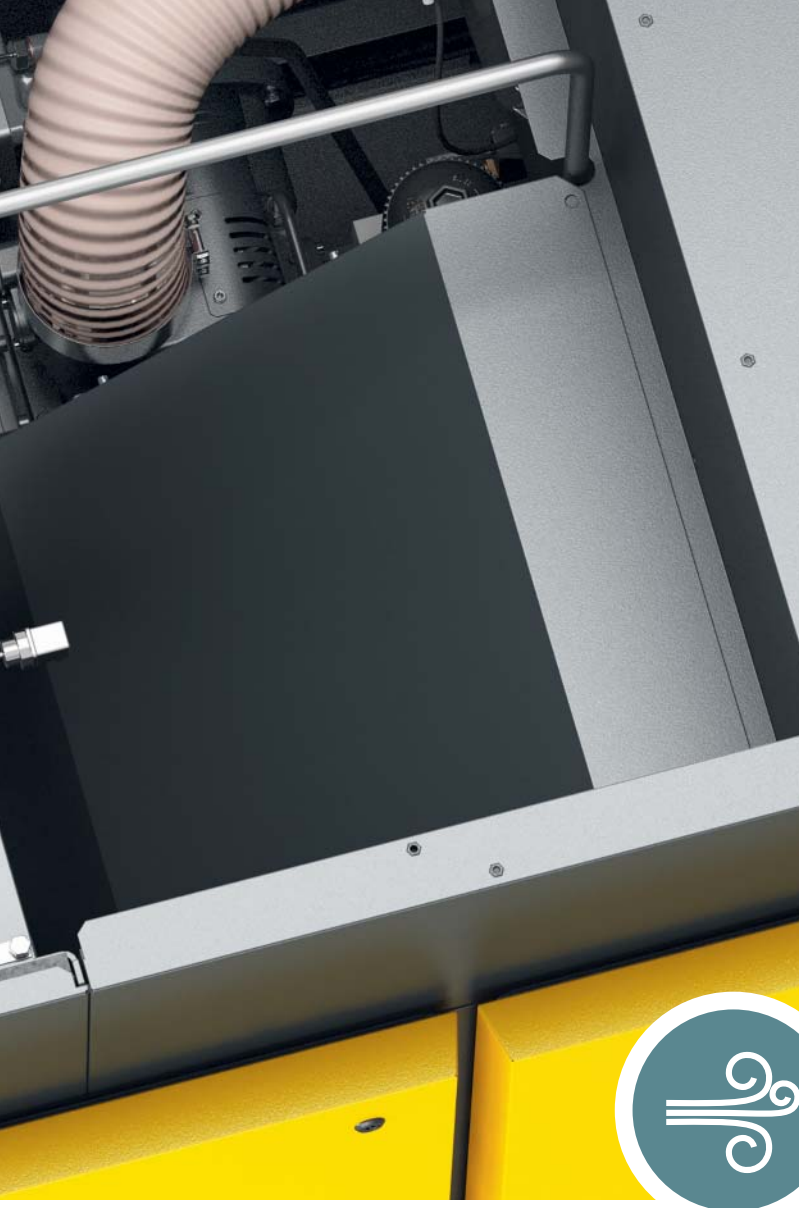

Air-cooling

Dependable performance— Even under extreme conditions


The benefits:

- Cooling water infrastructure not needed
- Meticulously designed machines with logical component layout make maintenance and service work quick and easy, ensuring further savings
- The heated cooling air can be easily re-used for space-heating



Outstanding durability thanks to pre-cooling

Highly effective pre-cooling with a stainless steel tube cooler on the high pressure side ensures outstanding air cooler durability. Furthermore, this durable cooler combination also delivers comparably low compressed air discharge temperatures.

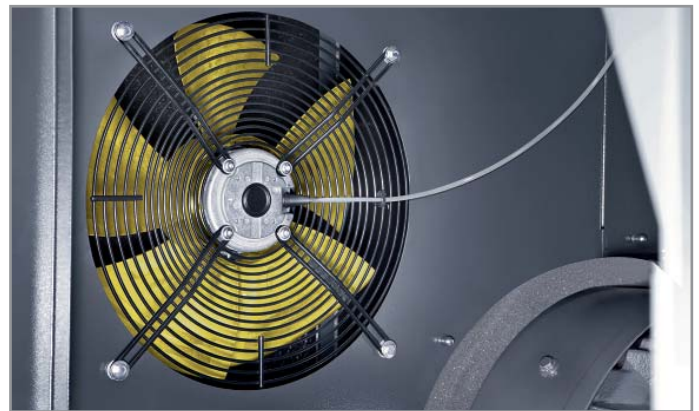

Energy-saving interior ventilation


When the large radial fan in air-cooled oil-free compressors is switched off as part of the transition to standby mode, this energy-saving, temperature-controlled standstill fan reliably removes the remaining heat in the compressor package.

Water-cooling

Compact energy savers


The benefits:

- Exceptionally low compressed air discharge temperature thanks to separate high quality air coolers
- Load-dependent cooling water for optimum compressor cooling and simultaneous, efficient cooling-water usage
- Compact design

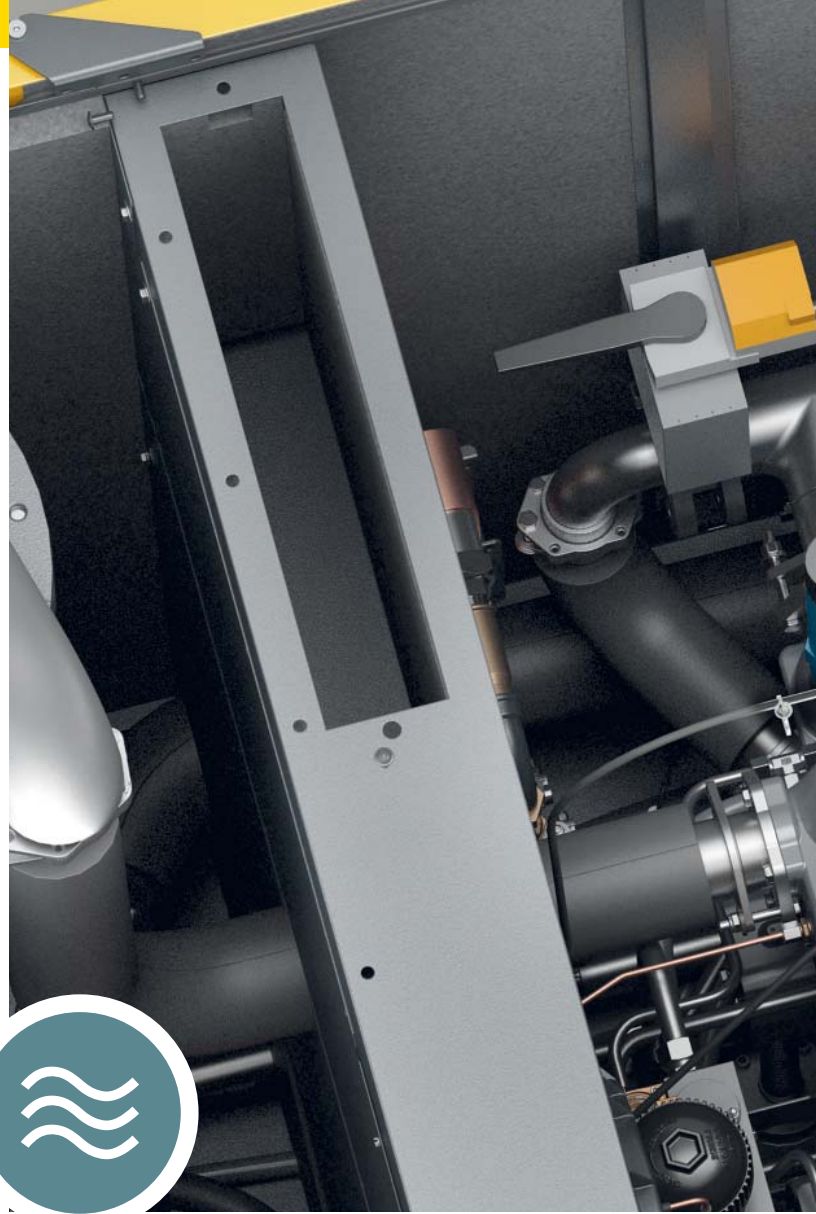


Parallel heat exchanger

Both the low and high pressure stages of Kaeser's water-cooled oil-free screw compressors are equipped with their own dedicated parallel heat exchanger for enhanced heat transfer. This optimized cooling improves specific power performance.

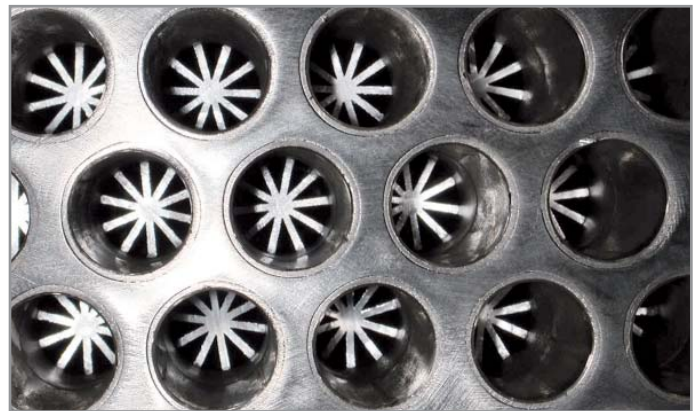

Optimized water cooler

Water-cooled compressors feature highly efficient air/water heat exchangers. Cupronickel (CuNi10Fe) cooling pipes with internal star lamella fins provide optimum heat transfer and the lowest possible compressed air discharge temperatures with minimal pressure loss.

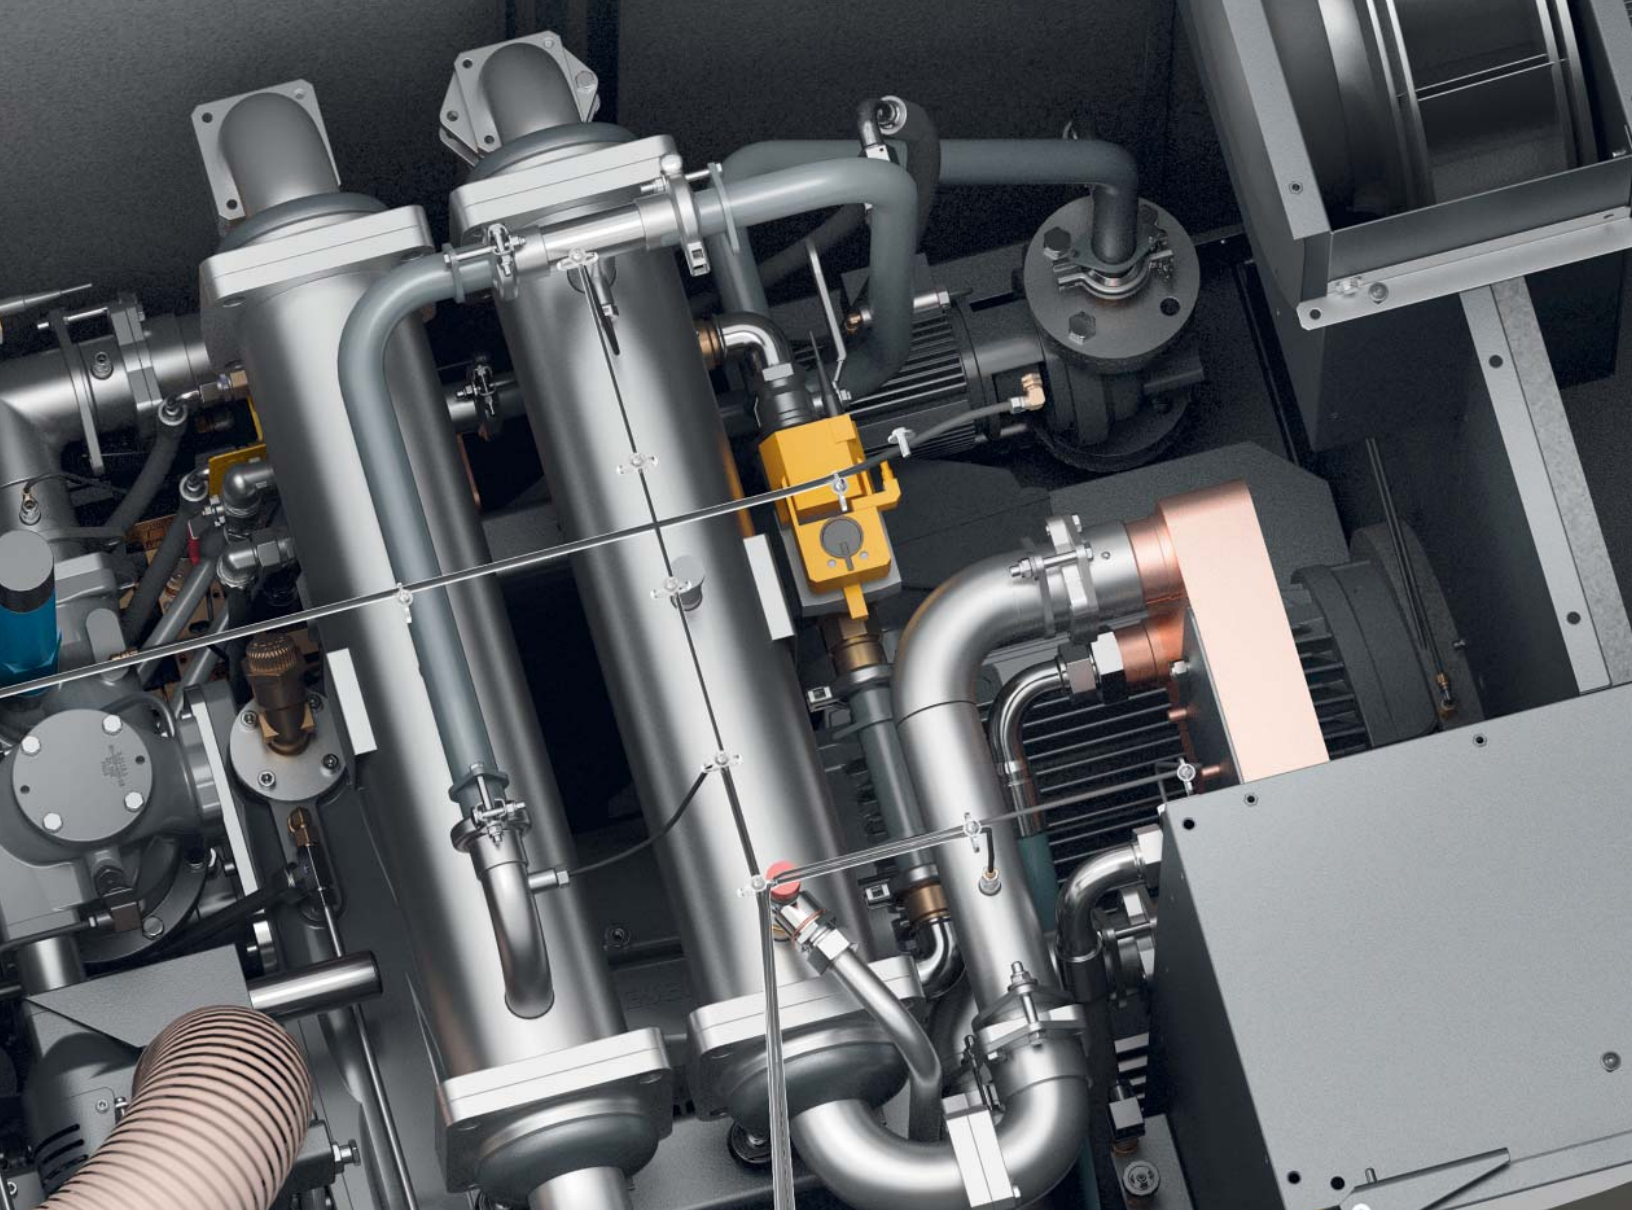

Smart control

Water-cooled oil-free compressors feature sealed water control valves that are actuated via the onboard Sigma Control 2. The controller precisely adjusts water volume to meet actual load requirement.



Permanent adjustment


The important but time consuming task of performing hydraulic adjustment of both aircoolers is carried out continuously and automatically when the machine is in operation. Cooling performance is therefore optimally matched to the operating conditions.





Variable frequency drive (SFC)

Kaeser's oil-free screw compressors are available with integrated Sigma Frequency Control (SFC) to provide superior part load efficiency and steady pressure in applications with varying air demands. Standard features include EMI filters and line reactors for extra electrical system protection.

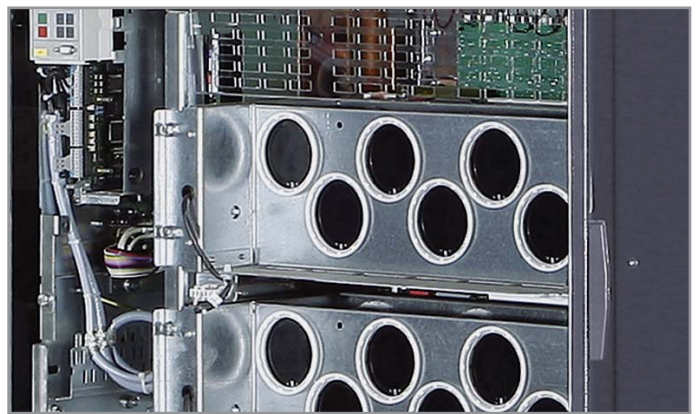

VFD drive from Siemens

SFC versions feature the latest in Siemens drive technology for enhanced reliability, world-wide support, and easy integration into system controls.



Safe operation even in hotter environments

A generously-sized SFC module and efficient control cabinet cooling allow Kaeser variable frequency drive compressors to be used in high ambient temperatures.

Integrated refrigerated dryer

Kaeser's CSG-2 models are available with an optional integrated refrigerated dryer to ensure compressed air drying for the intended application and all flow rates. These high quality industrial machines provide reliable protection from condensate damage — even under the harshest conditions.



Energy-saving drying

An integrated design, together with the generously-dimensioned aluminum block heat exchanger, keeps pressure loss less than 1.5 psi. The energy-saving scroll refrigeration compressor helps achieve compressed air energy savings.




Excellent accessibility

All refrigerated dryer components are easily accessible via the service door on the front of the unit, making dryer service and maintenance work a breeze.






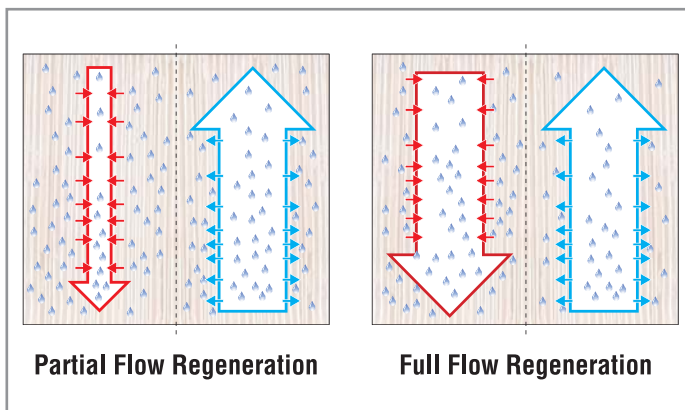

Full-flow regeneration

The i.HOC (Integrated Heat of Compression Dryer) system uses 100% of the heat of compression from the second compressor stage for drying purposes (full-flow regeneration). This heat is produced and available for use at zero cost.

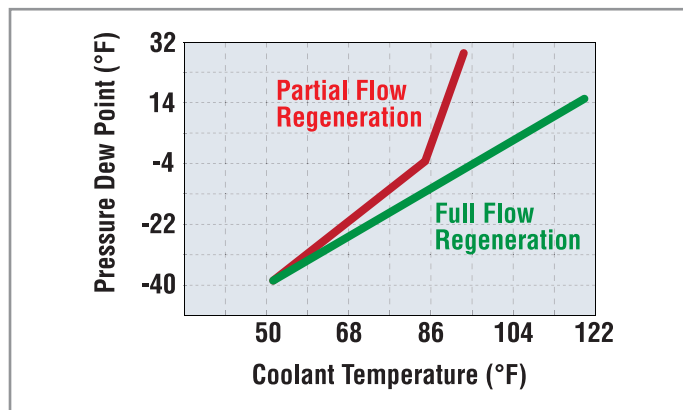

Drying even near the limit

The advantages of full flow regeneration become obvious, especially with increased coolant temperatures. Kaeser rotary drum dryers achieve outstanding drying results without additional electric heating for air regeneration.




Integrated Heat of Compression Dryer (i.HOC)

Dependable pressure dew point thanks to innovative process engineering

The patented i.HOC rotary drum dryer from Kaeser uses up to 100% of the heat of compression. Thanks to its full-flow regeneration method, these dryers deliver reliable pressure dew points up to an ambient temperature of 115 °F—without electrical heating or additional cooling of the regeneration air. Air-cooled and water-cooled versions for CSG-2 and DSG-2 models are available.


The benefits:

- Dependable pressure dew points below freezing even with high ambient or coolant temperatures
- Pressure dew point stability even at the lowest compressor load — without the need for a partial load compensator.
- Available with pressure dew point control as required
- Highly effective drying and heat recovery with water-cooled compressors

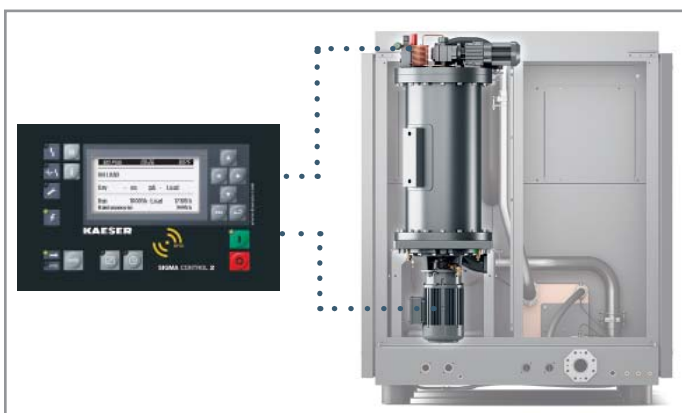


Perfect performance

The i.HOC rotary drum dryer's intelligent control ensures dew point stability even with fluctuating flow rates and at compressor partial load. When commissioned, the target pressure dew point is reached after just one rotation of the drum.

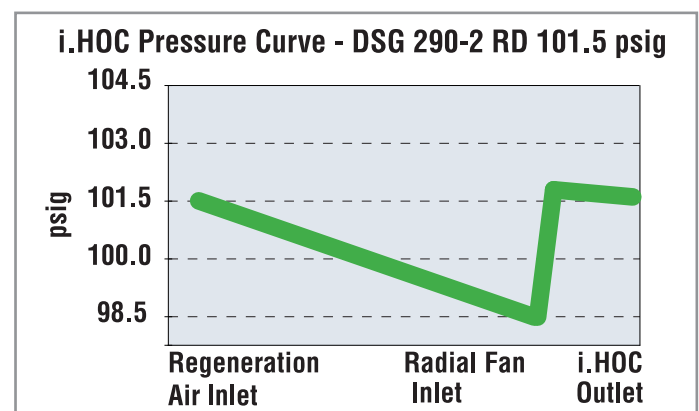

No pressure loss

The radial fan at the bottom of the dryer equalizes drying process pressure losses as required, thereby guaranteeing maximum pressure dew point stability and quality—the pressure at the i.HOC dryer outlet is higher than at the inlet.

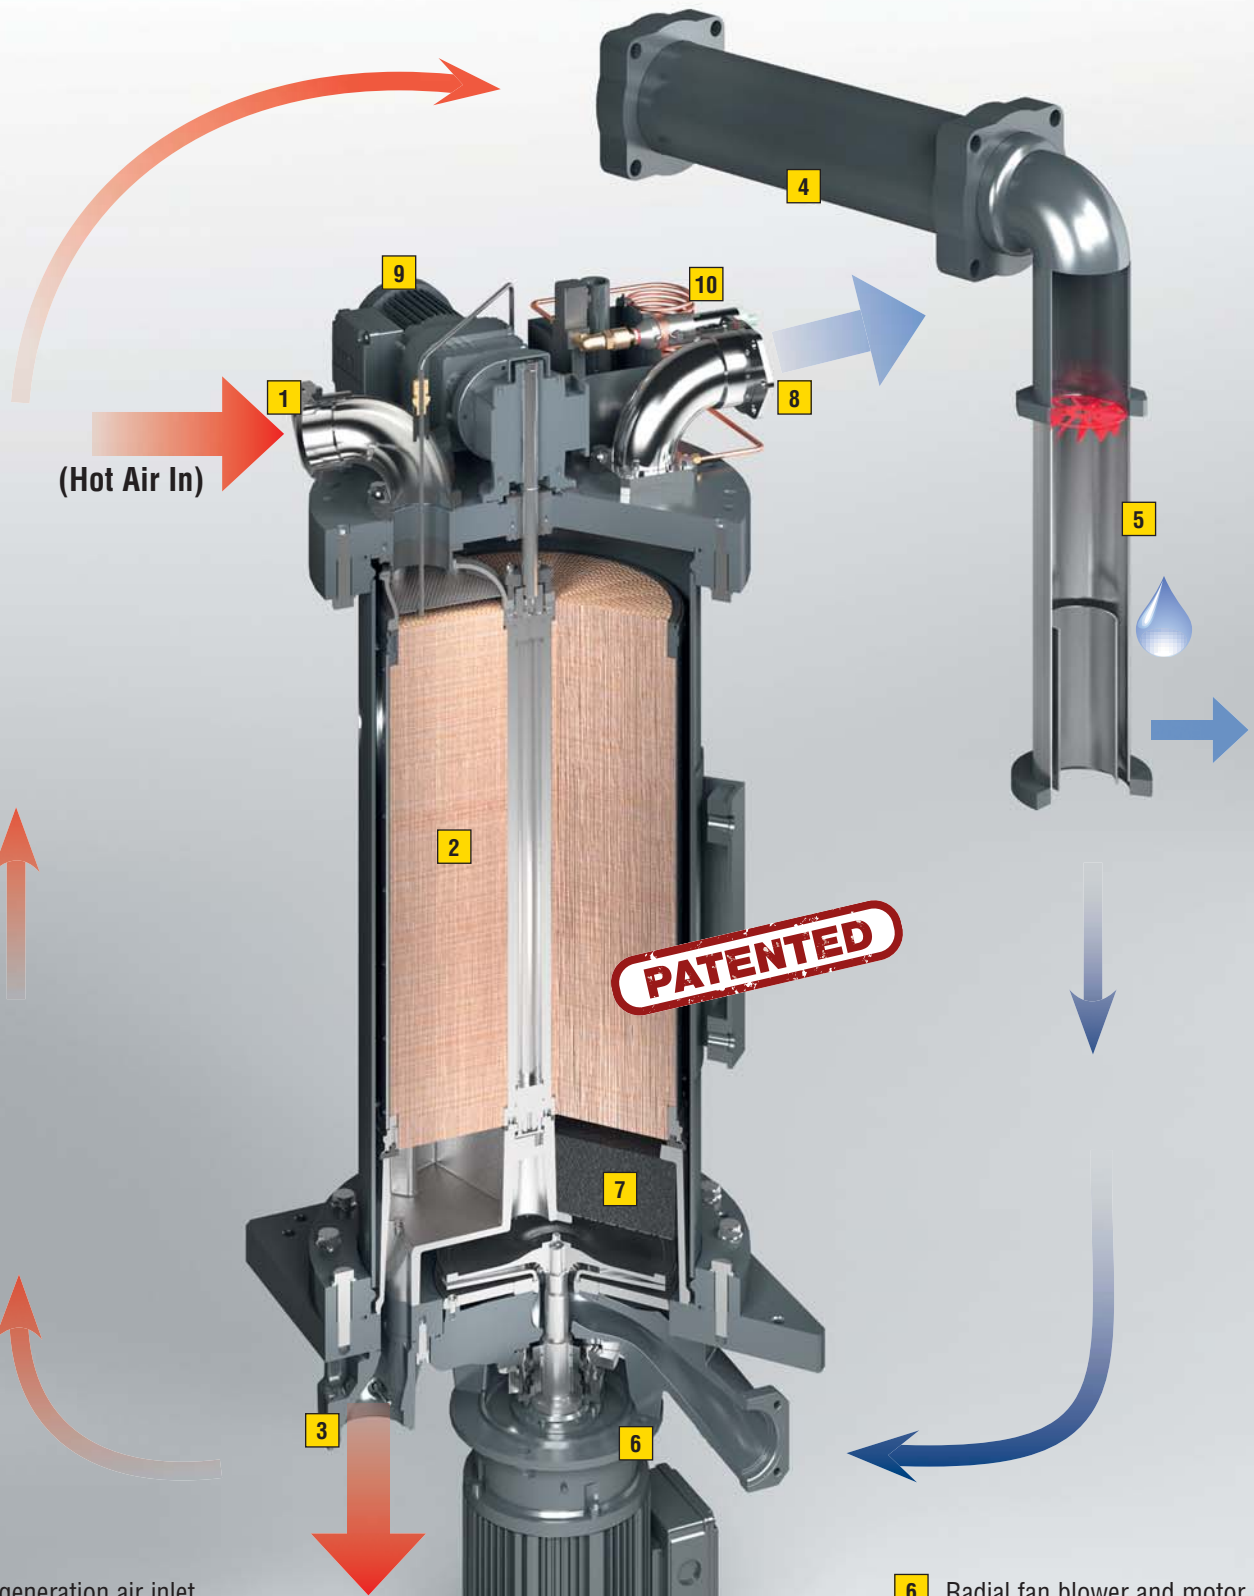

- 1** Regeneration air inlet
- 2** Drum
- 3** Regeneration air outlet
- 4** 2nd stage heat exchanger
- 5** Moisture separator

- 6** Radial fan blower and motor
- 7** Demister
- 8** Rotation dryer outlet
- 9** Drum motor
- 10** Pressure dew point sensor (optional)

i.HOC

Ultra efficiency and low pressure dew points



Durable, low-dust drum

The silica gel desiccant is embedded in a precisely manufactured drum with plain thrust bearings for exceptionally high run-out qualities. The desiccant has significantly less dust than others, which results in a longer service life for downstream particulate filters. The superior sealing between the desiccant and the regeneration sections reduces pressure dew point fluctuations and increases energy efficiency.




Variable speed drum motor

The speed of the drum is automatically adjusted to actual compressor performance in order to regenerate the desiccant as effectively as possible. This is the key to ensuring consistently low pressure dew points at varying loads.



Durable and efficient

Thanks to computational fluid dynamics optimization, the flow-optimized radial fan installed in the base of the dryer efficiently compensates for the pressure losses in the i.HOC cooling path.

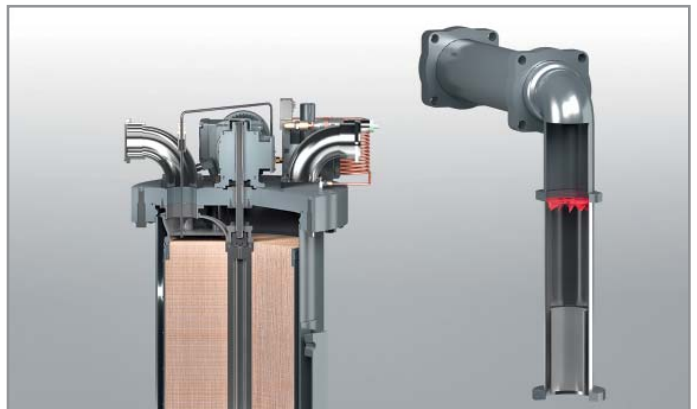

External condensate separation

i.HOC uses a highly efficient condensate separator downstream of the second stage heat exchanger in order to separate the condensate that precipitates during the regeneration process. Moisture is collected outside of the drum to prevent contamination and increase service life.

Air treatment options

Depending on the pressure dew point you need, Kaeser offers several options, from traditional refrigerated dryers to heatless desiccant dryers. The i.HOC dryer presents a unique combination of low dew point, space savings, and superb energy efficiency. Contact your local authorized Kaeser representative to discuss your air treatment needs.



+



Refrigerated dryer

For many oil-free applications, refrigerated dryers are the go-to choice for delivering the best possible energy efficiency and lowest investment cost for dew points down to 38°F. For lower dew points, a desiccant dryer is needed.


Integrated heat of compression dryer

For dew points as low as -22°F, the optional i.HOC drum dryer is integrated into the package. The hot compressed air from the second compression stage is used to regenerate the desiccant.

38°F

-22°F

Cost Comparisons

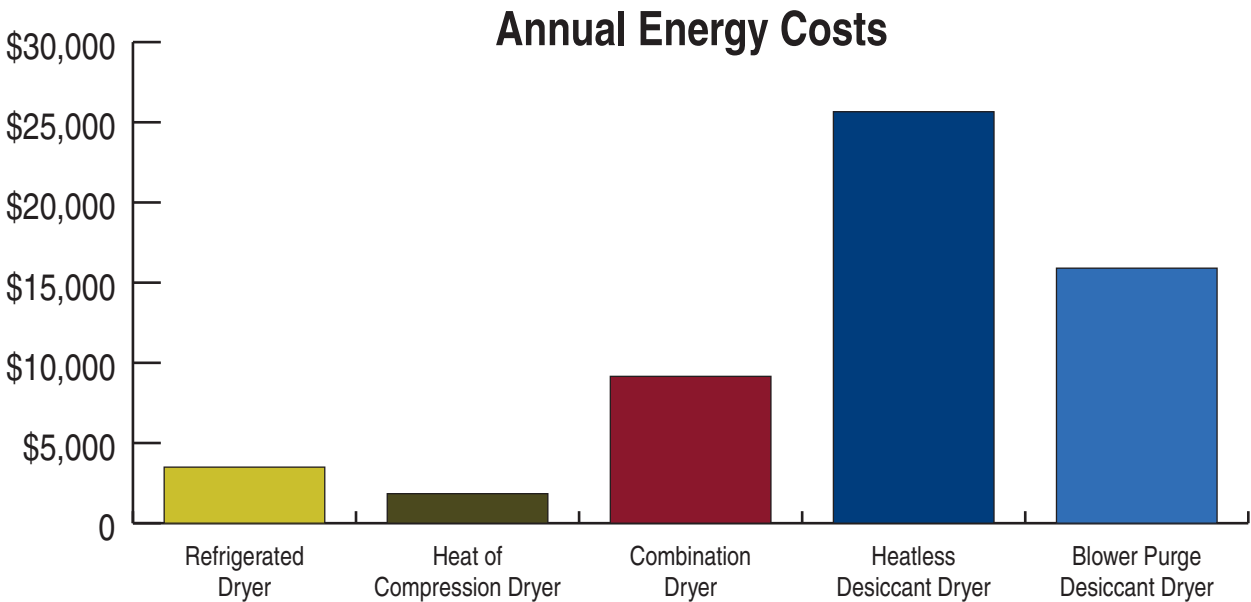

Based on 8760 hours of operation, maximum ambient temperature 100°F, air pressure at dryer inlet 100 psig, maximum air temperature at dryer inlet 100°F, maximum air flow rate of 1000 scfm, and \$0.10/kWh.



Combination dryer


Hybritec dryers combine the energy-saving operation of refrigerated dryers with the ultra-low dew points of blower purge desiccant dryers and are able to achieve dew points as low as -40°F with far less energy than a large blower purge dryer alone. They are ideally suited for large volume applications where the required dew points vary seasonally.

Heatless desiccant dryer

Kaeser's KAD heatless regenerative dryers use approximately 15% of their dry air output to regenerate the saturated air tower. KADs are initially less expensive than heat reactivated dryers, but they usually have the highest operating costs. KADs produce pressure dew points as low as -100°F at rated conditions.

-40°F

-100°F

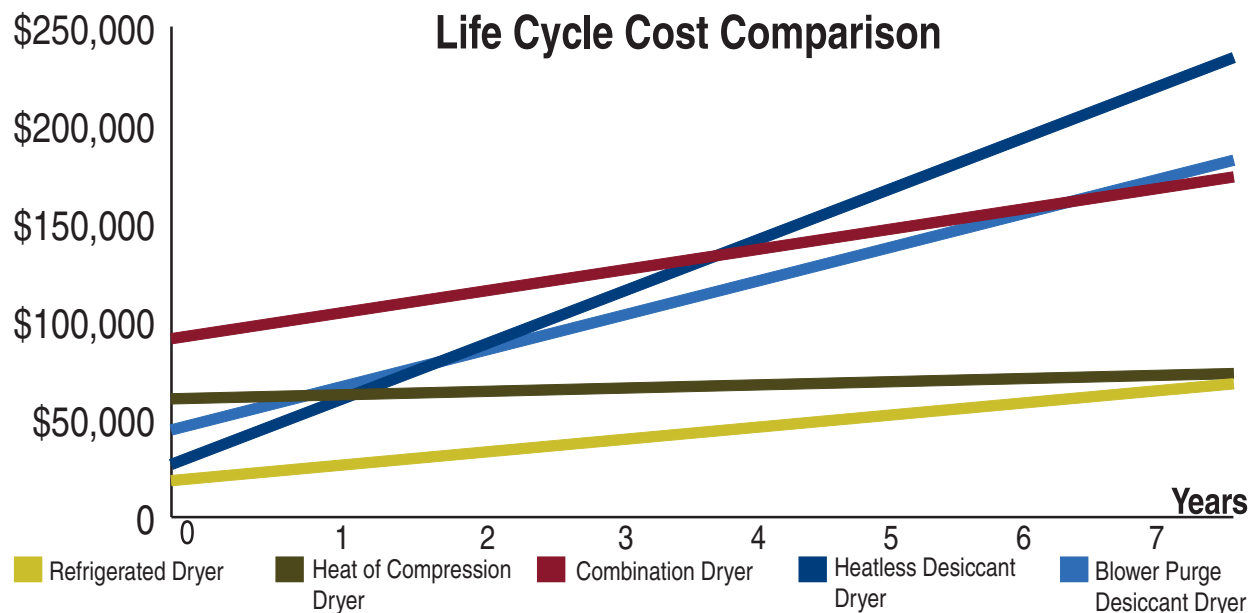

Based on 8760 hours of operation, maximum ambient temperature 100°F , air pressure at dryer inlet 100 psig, maximum air temperature at dryer inlet 100°F , maximum air flow rate of 1000 scfm, and $\$0.10/\text{kWh}$.

Heat recovery

Air-cooled compressors

Recovering warm compressor exhaust air is an innovative way to seize savings potential. Kaeser has the expertise to help you with everything you need to know and will be with you every step of the way.

Water-cooled compressors

Using the compact heat recovery module integrated directly into the compressor, generating hot water for production or auxiliary heating purposes couldn't be simpler. Cost and space-intensive external infrastructure is not necessary with Kaeser's solutions and the amortization period of the heat recovery module is usually less than a year (see sample calculation below).



Example amortization calculation water-cooled compressor

Inlet temperature	68°F
Relative humidity	30%
Cooling water inlet (primary)	68°F
Cooling water outlet (primary)	176°F
Compressor power consumption CSG-130-2 145 psi(g)	130 hp
Heat recovery potential based on total power consumption	87%
Recoverable heat capacity	113 hp
Annual operating hours	6,000 hrs
Kilowatt hours per year	505,296 kWh
Fuel costs	\$0.10 / kWh
Annual fuel cost savings	\$50,530
Amortization period	< 1 year



Up to
195 °F
hot



Process, heating, and service water

Compressor exhaust heat can be used to produce hot water with temperatures up to 195 °F, which can then be used for a wide range of applications.



Space heating with warm exhaust air

Heating is made easy thanks to radial fans with high residual thrust. The reusable warm air from air-cooled oil-free screw compressors can be easily ducted away to spaces that require heating—and usually without the need for additional fans.

Technical Specifications

SFC Units

Model	Pressure Range ⁽¹⁾ (psig)	FAD Complete Unit at Max Working Pressure Air-cooled (acfm) ⁽²⁾		Rated Motor Power (hp)	Sound Level (dB(A)) ⁽³⁾	Standard Air-cooled ⁽⁴⁾ Units		Water-cooled Units					
		Min.	Max.			Dimensions L x W x H (in.)	Weight (lb.) ⁽⁵⁾	Dimensions L x W x H (in.)	Weight (lb.) ⁽⁵⁾				
CSG 90-2 SFC CSG 90-2 T SFC CSG 90-2 RD SFC	60 90 125	117 114 125	412 369 320	75	74	98 x 65½ x 84½	5368	98 x 65¾ x 77¾	5368				
CSG 120-2 SFC CSG 120-2 T SFC CSG 120-2 RD SFC	60 90 125 145	141 161 145 170	461 459 430 400	100	76		5677		5677				
CSG 130-2 SFC CSG 130-2 T SFC CSG 130-2 RD SFC	125 145	182 193	468 467	125	76		5952		5952				
DSG 180-2 SFC DSG 180-2 RD SFC	65 90 125 145	310 332 309 337	795 761 670 615	150	81		135¼ x 687/8 x 937/8		9149	135¼ x 687/8 x 811/8	8488		
	DSG 220-2 SFC DSG 220-2 RD SFC	65 90 125 145	278 294 319 378	820 820 778 737	175				81		9480	8818	
	DSG 260-2 SFC DSG 260-2 RD SFC	65 90 125 145	309 330 346 364	967 966 911 858	200				82		9811	9149	
	DSG 290-2 SFC DSG 290-2 RD SFC	100 125 145	384 416 447	1059 1058 1057	250				84		10,141	9480	
FSG 420-2 SFC	100 125 145	555 604 653	1525 1430 1334	350	83				162¾ x 81¾ x 107½		15,543	149¼ x 82½ x 911/8	13,999
	FSG 500-2 SFC	100 125 145	624 663 702	1789 1710 1612	450						84		15,873

NOTES:

(1) Other pressures available from 45 to 145 psig. (2) Performance rated in accordance with CAGI/ISO 1217 test code. (3) Per ISO 2151 using ISO 9614-2.

(4) Dimensional drawings for air-cooled and water-cooled units as well as "T" and RD models are available on request from your local authorized Kaeser distributor.

(5) Weights may vary slightly depending on airtend model.

460 or 575 V, 3 ph, 60 Hz; other voltages available. Compressors are available water-cooled with stainless steel, plate type heat exchangers as standard equipment.

Shell and tube heat exchangers are available on request.

Specifications are subject to change without notice.

Fixed Speed Units

Model	Pressure Range ⁽¹⁾ (psig)	FAD Complete Unit at Max Working Pressure Air-cooled (acfm) ⁽²⁾	Rated Motor Power (hp)	Sound Level (dB(A)) ⁽³⁾	Standard Air-cooled ⁽⁴⁾ Units		Water-cooled Units	
					Dimensions L x W x H (in.)	Weight (lb.) ⁽⁵⁾	Dimensions L x W x H (in.)	Weight (lb.) ⁽⁵⁾
CSG 55-2 CSG 55-2T CSG 55-2 RD	90 125	247 192	50	73	98 x 64 ⁵ / ₈ x 84 ¹ / ₂	5005	98 x 64 ⁵ / ₈ x 77 ¹ / ₂	5005
CSG 70-2 CSG 70-2 T CSG 70-2 RD	60 90 125	344 298 245	60	73		5093		5093
CSG 90-2 CSG 90-2 T CSG 90-2 RD	60 90 125 145	390 342 296 273	75	74		5236		5236
CSG 120-2 CSG 120-2 T CSG 120-2 RD	60 90 125 145	461 459 421 420	100	75		5545		5545
CSG 130-2 CSG 130-2 T CSG 130-2 RD	125 145	457 456	125	76		5820		5820
DSG 140-2 DSG 140-2 RD	65 90 125 145	581 579 576 512	125	80		7496		6834
DSG 180-2 DSG 180-2 RD	65 90 125 145	694 692 689 576	150	81		7826		7165
DSG 220-2 DSG 220-2 RD	65 90 125 145	820 819 781 689	175	81		8157		7385
DSG 260-2 DSG 260-2 RD	65 90 125 145	966 964 908 816	200	82		8378		7716
DSG 290-2 DSG 290-2 RD	100 125 145	962 961 961	250	84		8819		8157

Continued next page

Specifications are subject to change without notice.

Fixed Speed Units—Continued

Model	Pressure Range ⁽¹⁾ (psig)	FAD Complete Unit at Max Working Pressure Air-cooled (acfm) ⁽²⁾	Rated Motor Power (hp)	Sound Level (dB(A)) ⁽³⁾	Standard Air-cooled ⁽⁴⁾ Units		Water-cooled Units							
					Dimensions L x W x H (in.)	Weight (lb.) ⁽⁵⁾	Dimensions L x W x H (in.)	Weight (lb.) ⁽⁵⁾						
FSG 300-2	90	1144	250	82	154½ x 81¾ x 107½	12,787	141⅜ x 82½ x 84	11,244						
	125	1006												
	145	795												
FSG 350-2	65	1391	300	82		154½ x 81¾ x 107½		13,228	141⅜ x 82½ x 84	11,685				
	90	1388												
	125	1261												
	145	1148												
FSG 420-2	65	1591	350	83				154½ x 81¾ x 107½		13,779	141⅜ x 82½ x 84	12,236		
	90	1589												
	125	1501												
	145	1261												
FSG 500-2	125	1769	450	83						154½ x 81¾ x 107½		14,110	141⅜ x 82½ x 84	12,566
	145	1586												
FSG 501-2*	145	1766	450	77	N/A		N/A							12,566

For NOTES see page 26

*Unit available water-cooled only

Specifications are subject to change without notice.



Built for a lifetime.™



www.kaeser.com

Kaeser Compressors, Inc.
511 Sigma Drive
Fredericksburg, VA 22408 USA
Telephone: 540-898-5500
Toll Free: 800-777-7873
info.usa@kaeser.com

Kaeser Compressors Canada Inc.
3760 La Vérendrye Street
Boisbriand, QC J7H 1R5 CANADA
Telephone: (450) 971-1414
Toll free: (800) 477-1416
info.canada@kaeser.com

Kaeser Compresores de México S de RL de CV
Calle 2 #123
Parque Industrial Jurica
76100 Querétaro, Qro.
Telephone: 01 (442) 218 64 48
sales.mexico@kaeser.com

Kaeser Compresores de Guatemala y Cia. Ltda.
Calz. Atanasio Tzul 21-00, zona 12
El Cortijo II, Bodega 501
01012-Guatemala City
Telephone: +502 2412-6000
info.guatemala@kaeser.com

Certified Management Systems

