


PRESET TORQUE SCREWDRIVERS

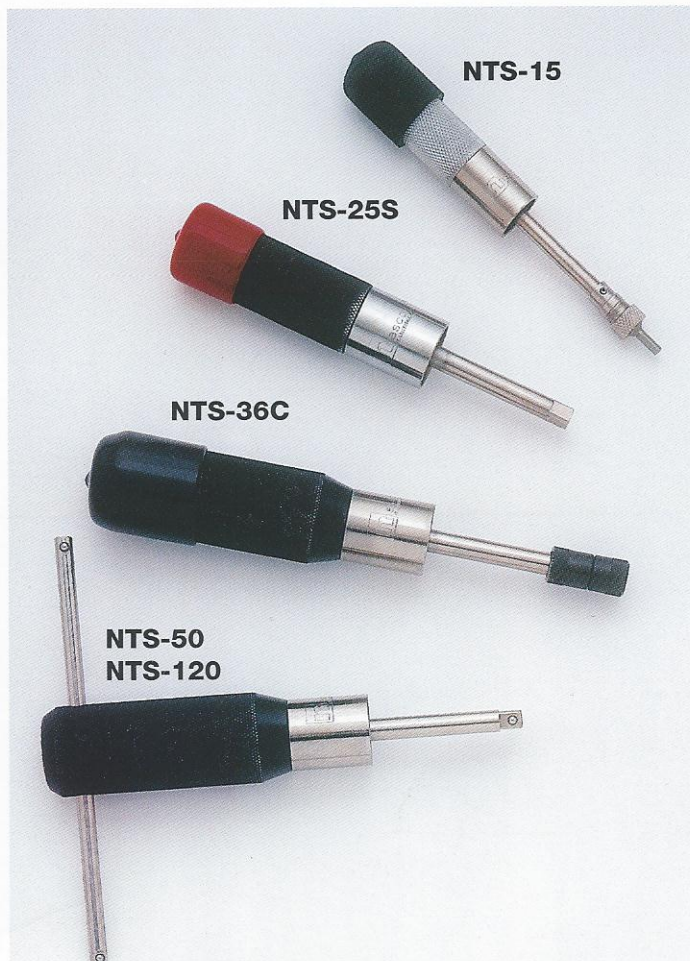

- Repeatability within $\pm 2\%^*$ of setting.
- Accurate radial ball clutch free-wheels when preset torque is reached. Fasteners can never be overtorqued.
- Exclusive cam design eliminates backlash when clutch releases.
- Available with either bidirectional or one-way clutch operation.
- Color coded band available in a variety of colors.
- Can be used as a fixture mounted clutch.
- Lifetime warranty.
- Exceeds all Government Specifications.

* Applicable from 20% to 100% of rated torque.
Lower settings repeatable within $\pm 3\%$.

<u>MODEL</u> *	<u>OVERALL LENGTH</u>	<u>EFFECTIVE TORQUE RANGE</u>		<u>DRIVE</u>	<u>PALM CUSHION</u>
NTS-15	5.25"	10-100 in-oz	1-7 cm-kg	1/4" chuck	Yes
NTS-25C	6.5"	3-25 in-lbs	4-29 cm-kg	1/4" chuck	Yes
NTS-25S	6.0"	3-25 in-lbs	4-29 cm-kg	1/4" sq.	Yes
NTS-36C	7.5"	4-36 in-lbs	5-41 cm-kg	1/4" chuck	Yes
NTS-36S	7.0"	4-36 in-lbs	5-41 cm-kg	1/4" sq.	Yes
NTS-50	7.0"	5-50 in-lbs	6-57 cm-kg	1/4" sq.	No
NTS-120	7.0"	12-120 in-lbs	14-138 cm-kg	1/4" sq.	No

* All standard models supplied with a bidirectional clutch. For one way clutch operation add suffix -W to the part number. A one-way clutch acts as a torque limiting screwdriver in the CW direction and a conventional screwdriver in the CCW direction for easy fastener removal.

To order, specify
- Torque setting